

# A Snapshot of U.S. Energy Options Today: Climate Change and Energy Security Impacts and Tradeoffs in 2025

*Background Information on the  
Energy and Technology Choices*

For more information, go to [www.wri.org/usenergyoptions](http://www.wri.org/usenergyoptions).



## Cellulosic Ethanol

Cellulosic ethanol is produced by breaking down complex sugars in plant material into simple sugars using an enzymatic process, and then fermenting the simple sugars to create ethanol. The end-product is identical to grain-based ethanol and can be used as an alternative fuel for transportation. Since cellulose is a primary building block of green plants, a wide variety of grasses and trees can be used as feedstock. Common candidates include fast growing trees and grasses such as switchgrass, corn stover, and grain straw. Cellulosic ethanol is an attractive carbon mitigation and energy security option because resource inputs and local environmental impacts are low compared to grain-based ethanol. There are several demonstration plants around the world, but no commercial plants operate yet.

From a climate perspective, cellulosic ethanol holds great potential to reduce emissions from transportation fuels. The U.S. Department of Energy believes that cellulosic ethanol can reduce lifecycle greenhouse gas emissions by roughly 80 percent compared to traditional gasoline. This is because the portion of the plant that can not be fermented—the lignin fibers—can be burned to generate the heat and power needed during the conversion process, displacing the carbon-intensive coal and natural gas that is used for processing grain ethanol. Grain ethanol's dependence on those fossil fuels results in a modest 10-20 percent reduction in GHG emissions compared to gasoline. Carbon capture could be employed during ethanol production to further reduce GHG emissions.

Cellulosic ethanol holds many of the same energy security benefits as grain ethanol—reducing dependence on foreign oil, diversifying energy supply, and decreasing the environmental impacts associated with the production and use of fossil fuels. However, much less land may be needed for cellulosic ethanol than grain ethanol, as cellulosic crops have the potential to yield about twice the energy per acre. From an energy-balance standpoint, as mentioned above, fewer fossil fuels are required to produce cellulosic ethanol than grain-based ethanol. Further, the diversity of crops that can be used greatly expands the potential to produce cellulosic ethanol across the U.S.

Despite great potential and many advocates, little cellulosic ethanol production capacity exists today. The primary challenges to widespread use of cellulosic ethanol are the high costs and complexity of the enzymatic process, and the high capital costs associated with financing new and untested technologies. While there have been significant advances in enzyme development in recent years, overall costs are still roughly twice that of producing grain ethanol. The Energy Policy Act of 2005 provides a number of incentives for cellulosic ethanol production, and requires the production of 250 million gallons by 2013. Concerns about grain ethanol's impacts on food security, local environmental quality and relatively minor GHG improvements should generate ongoing support for cellulosic ethanol.



Source: Union of Concerned Scientists

## Corn Ethanol

U.S. investment in corn ethanol has surged over the past few years due to high oil prices and growing concerns over rising petroleum import dependency. Grain ethanol is produced from the distillation of crops such as corn, barley and sugarcane that contain starches or sugars. It is typically blended into gasoline as E10 (10 percent ethanol) to improve octane levels and reduce vehicle pollutants. The world currently produces enough ethanol to displace roughly 2 percent of total gasoline consumption. Brazil is the world's largest exporter of ethanol, and its sugarcane industry supplies 40 percent of their transportation fuel.



Source: U.S. DOE

While ethanol has been around since the 1800s, it gained popularity in the 1970's during the OPEC oil disruptions. Ethanol has enjoyed renewed popularity as a replacement for both lead and methyl tertiary-butyl ether (MTBE)—less-than-ideal gasoline additives meant to improve combustion. The recent spike in oil prices, and resulting sense of energy insecurity, has created further momentum for ethanol use. Over one-third of the gasoline pumped in the U.S. now contains at least some ethanol, although it offsets only a few percent of the total gasoline used. The other common ethanol blend, E85 (85 percent ethanol), requires special engine modification and can only be used in flexible fuel vehicles (FFV).

Corn ethanol has some lifecycle greenhouse gas benefits compared to regular gasoline. The general consensus among researchers is that corn ethanol provides a lifecycle 10-20 percent reduction in greenhouse gases compared to traditional gasoline, although outlying estimates also exist. The fermentation process requires significant energy input, often in the form of coal or natural gas. Finally, growing the crops that can be converted to ethanol often carries a significant local environmental penalty in terms of water, fertilizer, and pesticide use.

Ethanol production has grown by roughly 30 percent annually in the U.S. recently. Federal subsidies since 1978 have allowed production costs to remain competitive with gasoline, with the current tax credit at 51 cents per gallon. In 2005, 4 billion gallons of ethanol were produced in the U.S. The Energy Policy Act of 2005 requires almost doubling that production to 7.5 billion gallons a year by 2012, and numerous energy legislation proposals in Congress have called for up to 60 billion gallons of "renewable fuels" by 2030.

A major barrier to expansion of grain ethanol in the U.S. is the amount of corn required. Already, 10-20 percent of the nation's corn harvest goes to ethanol production. If more corn is used for ethanol, we will likely see higher prices for commodity crops, higher prices for livestock and other processed goods that rely on commodity crop inputs, fewer commodity crop exports, and more land dedicated to cultivation. Although recent advances have made ethanol production more efficient than in years past, other major cost-reducing breakthroughs are not expected. Another barrier to greater use of grain ethanol is that while there are more than 4 million FFVs on the road, most E-85 stations are in the Midwest, and developing a nationwide infrastructure of service stations will be necessary for large-scale penetration.

## Expanding Domestic Oil and Natural Gas Production

Domestic U.S. oil production peaked in 1970 and has declined steadily since. Currently, the U.S. is able to meet one-third of its petroleum demand with domestic resources, and imports the remaining two-thirds. Domestic crude oil reserves are estimated at around 22 billion barrels, mostly found in Texas, the Gulf of Mexico, Alaska, and California. For comparison, global reserves are estimated at 1.1 to 1.3 trillion barrels.

U.S. natural gas production is also near its peak, but domestic production continues to meet over 80 percent of demand. The remaining imports come by pipeline from Canada and Mexico, and as liquefied natural gas at 4 major import terminals. While global natural gas reserves are thought to be over 170 trillion cubic meters (TCM), domestic reserves amount to only 5.6 TCM.

Both oil and natural gas contribute to climate change by forming carbon dioxide during combustion. Natural gas emits only about half, and oil about two-thirds, the carbon dioxide per unit of energy as coal. The greenhouse gas profiles of imported oil and gas resources compared to their domestic counterparts are roughly similar. In some cases, imports may result in slightly higher emissions since they are often transported a greater distance. In other cases, however, carbon-intensive infrastructure may be needed to deliver domestic oil and gas to U.S. markets. Oil from the Trans-Alaska pipeline, for example, almost certainly has higher lifecycle greenhouse gas emissions than oil from Canada or even Nigeria.

Other environmental concerns related to oil and natural gas production and transport include: spills, leaks, explosions, and damage to natural habitats. While improved exploration and drilling practices have dramatically reduced local environmental impacts, oil and gas production in pristine areas remains an invasive activity. Refineries that convert crude oil into valuable petroleum products have more concentrated environmental and safety impacts.

Exploiting domestic sources of oil and natural gas helps reduce the amount of oil that the U.S. must import. However, the amount of domestically available oil is limited and the public often opposes drilling in sensitive areas. Furthermore, domestic oil and gas is usually more expensive than imports. When oil and natural gas prices are high, pressure increases to open exploration and drilling in lands previously considered off-limits, such as the Arctic National Wildlife Refuge and many offshore areas. For example, offshore drilling along in the eastern Gulf of Mexico and along the east and west coasts has been prohibited since 1980. Late in 2006, however, Congress voted to open 8.3 million acres to drilling in the Gulf of Mexico that had been previously protected under the ban.



Source: NETL

## Liquefied Natural Gas

Natural gas accounts for over one-fifth of global energy use. Where pipelines are unfeasible, natural gas can be transported economically by lowering its temperature and increasing pressure until it becomes a condensed liquid. A global market for liquefied natural gas (LNG) has existed since the 1970s. Strong growth in LNG markets is expected to continue as both new producers and consumers emerge, and terminal infrastructure costs continue to decline.

Natural gas offers distinct greenhouse gas benefits compared to coal and oil, although some of that benefit is lost due to the energy penalty of converting the gas to liquid form and vice-versa. A carbon value of perhaps \$20 to \$40 per ton of CO<sub>2</sub> would provide powerful incentives to switch from coal to natural gas in electricity generation. Natural gas also has significant criteria pollution (oxides of sulfur and nitrogen, particulates, and carbon monoxide, for example) benefits compared to other fossil fuels.

Considerable uncertainty surrounds the future of liquefied natural gas in the United States. Natural gas production in the U.S. peaked in the early 1970s. While prices remained low for much of the 1980s and 1990s, recent price instability reflects supply uncertainty. Key variables surrounding future markets for LNG in the U.S. include:

- Climate change and environmental policies that will impact relative pricing of fuels
- LNG demand in key Asian and European markets
- Investment constraints in building new LNG liquefaction terminals in key gas producing countries such as Qatar, Nigeria, Russia, Iran, Algeria, Trinidad and Tobago, and others
- Public response to the siting and safe operation of LNG import terminals
- Developments of alternative technology, including “clean” coal, renewable, nuclear power, and gas-to-liquid (GTL) fuels

Global LNG trade is now expanding rapidly, and the U.S. appears set for rapid demand growth as well. The U.S. Energy Information Administration forecasts that U.S. LNG imports are projected to increase nearly 8-fold by 2030. While global markets are expected to increase in flexibility, there are very real concerns about energy security and relying on a small group of producers to provide the fuel.




Source: Wave Dispersion Technologies, Inc



## CO<sub>2</sub>-Enhanced Oil Recovery

Only a small percentage of the petroleum in most oil fields can be recovered economically. One option to increase oil recovery is to pump CO<sub>2</sub> into the reservoir to improve the flow of remaining oil through the pore space. After the oil-CO<sub>2</sub> mixture reaches the surface, the CO<sub>2</sub> is separated from the oil and recycled back to the reservoir. A side-effect of enhanced oil recovery is that a portion of the CO<sub>2</sub> that was used to force oil out of the formation is sequestered in the reservoir's pore space.

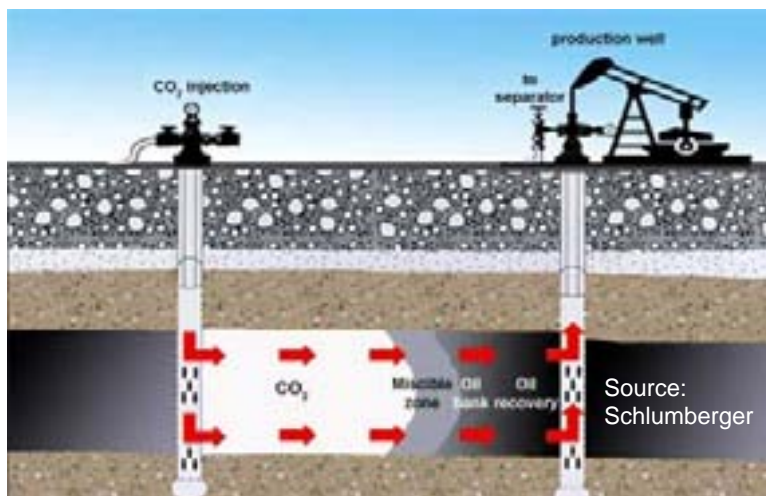

CO<sub>2</sub>-EOR is currently used to optimize oil production, but can also be adjusted to boost the amount of carbon dioxide that stays sequestered in the reservoir.

CO<sub>2</sub> has been used in the Permian Basin of Texas for three decades to enhance oil recovery. Most of the CO<sub>2</sub> is supplied from natural sources in Colorado and New Mexico via pipeline, so there are currently few climate benefits in the process. But an experienced industry has developed and is capable of using anthropogenic CO<sub>2</sub> (captured from fossil fuel burning power plants and industrial processes) for the same purpose. A large-scale coal gasification plant in North Dakota is currently capturing its CO<sub>2</sub> and piping it to Weyburn, Canada where it is used for enhanced oil recovery. Other large anthropogenic CO<sub>2</sub>-EOR projects are under development.

Currently, CO<sub>2</sub>-EOR is used to produce about 250,000 barrels per day of oil in the U.S. that might otherwise not exist. A recent study by Advanced Resources International states that an additional 4 to 47 billion barrels of domestic resources could be economically recovered using CO<sub>2</sub>-EOR. The study notes that at least 8 billion tons of CO<sub>2</sub> could be sequestered in the U.S. by using EOR. The carbon abatement cost of CO<sub>2</sub>-EOR varies according to field and the price of oil; in some cases it can have negative costs according to Battelle Memorial Institute.

Currently, regulations exist to govern CO<sub>2</sub>-EOR activities in order to prevent ground water contamination. However, there are no regulations to govern CO<sub>2</sub>-EOR activities operating with the purpose of permanently sequestering CO<sub>2</sub>. If and when the U.S. enacts a climate policy that requires CO<sub>2</sub> mitigation, new standards will need to evolve that allow measuring and crediting of CO<sub>2</sub> that is sequestered in oil fields. There are questions of “additionality” that must be addressed: some argue that the net climate impact of sequestering CO<sub>2</sub> in an EOR operation is marginal because of the extra oil that is produced and then combusted. Others argue that the oil would still be produced elsewhere. Other complex regulatory issues such as plant siting, injection criteria, remediation options, and liability concerns must be addressed before CO<sub>2</sub>-EOR sequestration is widely deployed as a carbon mitigation technology.

## Pulverized Coal Power

Pulverized coal power plants first appeared in the 1920s and serve as the backbone of the power sector in the U.S. They currently supply over half of U.S. electricity. While vastly improved over the past 80 years, pulverized coal remains a relatively simple technology, converting a little more than one-third of the fuel's energy potential into useful electricity.

Pulverized coal power generation starts by crushing coal into a fine powder that is fed into a boiler where it is burned to create heat. The heat produces steam that is used to spin one or more turbines to generate electricity. Subcritical plants make up the bulk of the U.S. pulverized coal system, with efficiencies for new plants usually around 37 percent. Supercritical plants use higher pressure and temperatures to boost efficiency to 40 percent or more. Ultra-supercritical, using still higher pressures, achieves 42-45 percent efficiency. Europe and Asia lead in the deployment of the most advanced pulverized coal systems, although they are gaining renewed attention in North America as well. Carbon dioxide can be captured from the exhaust plume of pulverized coal plants and then sequestered in geological formations, but this process is relatively expensive, especially for retrofit applications.



A Pulverized Coal Plant in Indiana U.S. Source: Foster Wheeler

Pulverized coal power plants have gained renewed interest this decade due to surging natural gas prices. The levelized cost of electricity generated at most pulverized coal plants in the U.S. is currently less than that of natural gas combined-cycle plants. While the capital costs of gas-fired combined-cycle units are only half that of pulverized coal, the fuel costs are much higher and often unstable. Utilities pay special attention to predictability of prices and currently shy away from high and unstable natural gas prices. Moreover, as domestic production of natural gas is limited, further additions to gas-fired power generation would require more imported liquefied natural gas, and exacerbate energy security concerns.

Pulverized coal units have significant environmental concerns. Emissions of oxides of sulfur and nitrogen contribute to acid rain and ozone formation, and are dangerous to human and ecosystem health. Most plants have scrubbers to remove a portion of these gases from the exhaust plume, although power plant efficiency declines as a result. Other emissions include particulates, heavy metals such as mercury and arsenic, and carbon dioxide. Coal is the most carbon intensive fuel and contributes to global warming more intensely than any other source of energy. Given the enormous number of pulverized coal plants being added in China and India each year, we will likely need to find a way to retrofit existing plants to capture CO<sub>2</sub> emissions. This is feasible, but will be expensive unless dramatic advances in technology are achieved.

Using domestic coal offers the impression that countries can insulate themselves from global energy insecurities, but the subsequent increase of greenhouse gas emissions can create an altogether different type of security problem.

## Coal-to-Liquids

Coal-to-liquids (CTL) is a suite of technologies that convert coal to a liquid fuel such as synthetic diesel. Coal is a widely available, abundant, and relatively inexpensive form of energy. However, coal production constraints, infrastructure and externalized costs, and high greenhouse gas emissions may limit CTL's contribution to the U.S. goal of energy security.

CTL technologies were developed in the 1900's spurred by the necessity of domestic fuel production for Germany during WWII and for South Africa during its international isolation in the Apartheid era. Proponents argue that low-cost coal can make CTL products commercially viable when oil prices are high. During the high oil prices of the 1970's numerous additional techniques and processes were developed to more efficiently turn coal into liquid fuel.

Currently, only South Africa, with plenty of coal but little oil and gas, uses CTL to meet a share of its transportation fuel needs. More importantly, CTL offers countries like the U.S. and China the perceived opportunity to insulate themselves from unstable international oil markets.



Source: Sasol CTL plant in South Africa, Cleaner Coal Technology Program. London, UK

The major drawback of CTL technology, besides high cost, is the increased carbon dioxide emissions and high water requirements. Lifecycle CTL greenhouse gas emissions are nearly double those of conventional oil. Shifting any sizable portion of fuel usage to CTL necessitates a carbon mitigation strategy to ensure that climate objectives are met. Carbon capture and sequestration (CCS) can be used during CTL production, but would only offset a portion of the increased carbon emissions. Final greenhouse gas emissions using CTL with CCS would still be equal to or higher than using standard petroleum, while costs would rise significantly.

Some believe that CTL is economically viable when crude oil prices reach \$35 per barrel or more, although this has not been demonstrated in transparent, commercial settings. Capturing a portion of the process-related CTL carbon dioxide and sequestering it underground would further increase costs. China is currently constructing several large CTL facilities and experimenting with a largely untested version of the technology (direct liquefaction). It is now widely acknowledged that China will have difficulty deploying CTL on a massive scale unless the issue of water usage is resolved (each gallon of CTL product requires 10 gallons of process water). In its "high scenario," the Energy Information Administration forecasts that 1 percent of U.S. oil needs will be met with CTL fuels in 2025. If oil prices increase dramatically or major breakthroughs in CTL technologies occur, CTL's potential to contribute could increase significantly.



## Gas-to-Liquids

Gas-to-liquid, or GTL conversion, refers to technologies that create diesel fuel from a methane-rich feedstock such as natural gas. While offering certain environmental benefits, GTL production is limited by high investment costs and the uncertainty of natural gas prices.

Diversification of supply is a major tenet of the US energy security strategy. A significant share of natural gas is located outside of the Middle East, making GTL an attractive diversification alternative to oil. However, because 45 percent of the natural gas input is used in the conversion process from gas to liquid, the economics of GTL usually only make sense for inexpensive “stranded gas.” Stranded gas refers to gas that is uneconomic to develop due to transport distances or lack of infrastructure. The bulk of the stranded gas resources are also in politically less stable regions, and therefore use of these resources would do little to assuage U.S. energy security concerns.



*Aerial photo of the GTL plant at Escravos, Nigeria.  
Photo courtesy of Sasol Chevron*

Even stranded gas costs may not remain low enough to make GTL economically attractive. As the cost of LNG liquefaction terminals continue to decline and demand increases, the opportunity costs of stranded gas will rise. Currently, stranded gas prices remain low enough to make GTL projects possible. Global natural gas production is expected to peak about 15 years after oil does, so there will likely be a period of greater GTL technology deployment, some of which we are beginning to see now in places like Qatar and Malaysia.

A major environmental benefit of GTL fuel is that it is virtually sulfur-free, and has significantly lower emissions of carbon monoxide, hydrocarbons, nitrogen oxide and particulate matter than conventional petroleum products. However, GTL fuel lifecycle greenhouse gas emissions are approximately 25 percent higher than conventional oil. Carbon capture and sequestration (CCS) could be used during the conversion process to capture enough emissions to make GTL emissions less than those of conventional oil, but costs would further increase.

In general, converting natural gas to liquid petroleum products is becoming more competitive with conventional oil production as the conversion process improves and the benefits of clean synthetic diesel are priced into markets. But competition between liquefying natural gas for the power and industrial sectors, and converting it to a petroleum product for the transport sector will remain a key investment decision. For these reasons, the Energy Information Administration forecasts a relatively minor 0.2 million barrels per day of production increase in its “high scenario” for 2030.

## Wind Power

Humans have used wind as a source of energy for thousands of years. Early windmills ground grain and pumped water. In the late 1800's, inventors designed windmills to produce electricity. However, their use declined during the Great Depression when rural electrification programs extended inexpensive grid electricity to rural areas. Today, wind power is again growing rapidly.

Wind is an abundant source of energy in the U.S. and can contribute to energy security by providing a low-cost, renewable supply. Good wind resources exist in almost every state and are theoretically capable of providing more than the total current electricity consumption of the U.S. Wind is the least expensive renewable energy source today and future technology developments are expected to lower costs further.



Investment in wind power has fluctuated over the past three decades according to changes in fossil fuel prices and government subsidies. When oil prices skyrocketed in the 1970's, investment in developing wind technology increased. Later, when prices fell, investment and development of wind energy slowed. In 2006, the United States total wind power capacity stood at just over 11 gigawatts. While this represents only 0.5 percent of our electricity consumption, the total installed capacity since 1999 has grown 5-fold.

Investment in wind energy is increasing rapidly for a number of reasons. First, federal and state tax credits subsidize wind power production by 1.9 cents per kilowatt-hour. State programs requiring utilities to allow for net metering or to buy back renewable energy production from individuals has also spurred investment. State renewable portfolio standards that require a certain percentage of the electricity to come from renewable resources have also increased investment in wind energy. Demand for wind power has also increased due to public concern over global warming and some utilities allow consumers to choose to purchase renewable energy such as wind by paying a small additional monthly fee. Technology advancements which have lowered the overall cost of wind power and decreased maintenance and increased reliability, has also spurred investment.

The main benefit of wind power is that it does not produce nitrogen and sulfur oxides, particulates, and mercury—the pollutants responsible for acid rain and smog, amongst other environmental harms. It is also a carbon free energy source and therefore can help users meet carbon mitigation goals. Wind power also offers a boost to rural economies, where most wind resources are located. Finally, wind power has predictable fuel costs (zero) over the life of the project, something that many gas-fired combined-cycle operators wish for.

Because wind is not always available, it is not a good baseload power option. However, even without improvements to the power grid to allow transmission from windy regions to large power loads, wind can supply a much larger percentage of our electricity needs than it does today. Countries such as Denmark have shown it is possible to supply one-fifth of their electricity from wind without sacrificing reliability. The American Wind Energy Association estimates that up to 6 percent of the nation's electricity could be supplied by wind power by 2020. The U.S. Department of Energy, however, forecasts that wind will still only provide 1 percent of U.S electricity in 2025.

## Building Efficiency

Residential and commercial buildings consume over one-third of all energy and two-thirds of all electricity consumption in the U.S. Building techniques and materials exist that can dramatically reduce building energy consumption. (See Center for Health and Healing at right with a 61 percent projected energy savings). For example, simply orienting windows to capture the sun's warmth during the winter and the use of appropriate overhangs to keep out the hot summer sun can reduce heating and cooling costs by half or more.

Unfortunately, most buildings do not take advantage of the significant energy savings available. Because buildings have life spans of 50 to 100 years or more, their poor efficiency has a long-lasting effect on energy needs.



Source: Natural Resources Defense Council

While some states such as California have mandated efficiency standards for new buildings, there is no federal program that mandates efficient building practices for the private sector. In contrast, almost all of Europe has minimum building efficiency standards. There are, however, federal regulations which require federal buildings to comply with efficiency standards.

The Leadership in Energy and Environmental Design (LEED) rating system is the most widely used energy efficient building standard. Buildings are awarded points based on areas such as water efficiency, energy efficiency, renewable materials, and indoor environmental air quality. Buildings which are LEED certified, then, offer more than energy efficiency, they also conserve water and other natural resources and provide a healthy space for occupants.

Building efficiency reduces the pollutants and greenhouse gases emitted into the atmosphere from electricity generation and other fossil fuel use. A study done in 2004<sup>1</sup> found that the costs of constructing energy efficient buildings were the same or only 2 percent more expensive to construct than their "business as usual" counterparts. This marginal increase in cost was recovered by the builders through faster sales and premiums. The owners of the buildings save many times over the increased costs through lower energy bills. Still, construction of energy efficient buildings is hindered by lack of regulations, inexperience of developers, and the fact that developers have to pay the up front cost, while it is the buyers who realize the significant savings. To address this issue, the federal and some state and local governments offer tax credits and other incentives to help offset increased capital costs.

The Energy Information Administration estimates that building energy usage could decline by 20 percent by 2025 if energy efficiency measures are adopted. Out of a toolbox of technologies that can make the U.S. more energy secure and reduce carbon emissions, building efficiency alone has the potential to save owners billions of dollars in energy costs each year.

<sup>1</sup> Davis Langdon Adamson, "Costing Green: A Comprehensive Cost Database and Budgeting Methodology"

## Nuclear Energy



Nuclear energy is the largest emission-free source of power generation in the U.S. It provides one-fifth of our electricity. There are 103 commercial nuclear reactors currently in operation in the U.S. The last commercial plant was commissioned in the 1970s after which the nuclear industry experienced major setbacks due to financial, regulatory and safety issues. More recent advances in nuclear technology, along with concerns over global warming, have set the stage for a possible revival of nuclear power.

Nuclear power was once famously described as “too cheap to meter”. After a partial meltdown at Three Mile Island in 1979 and complete meltdown and release of radioactive

material at Chernobyl in 1986, nuclear power suffered a major setback. New safety measures and designs were enacted. Costs rose considerably, making nuclear power now “too expensive to justify” in most countries. South Korea, Japan, and a handful of other countries continued to construct nuclear power plants, but at a much slower pace.

Today, proponents of nuclear power believe that technological risks have been largely addressed. And while it can be argued that the actual risks of nuclear power are far lower than the perceived risks, and that coal-fired power plants have killed a far greater number of people than nuclear energy, most communities do not want nuclear plants nearby. No country has solved the issue of long-term waste disposal, and new fears have emerged in the post-9/11 world that nuclear plants will become targets for terrorists.

Besides public opposition, the revival of nuclear power depends on its cost competitiveness with other energy options. The levelized cost of nuclear power today is difficult to estimate since few plants are being built, but a recent study by MIT put it at 6.7 cents per kilowatt-hour, considerably higher than pulverized coal or natural gas plants. Still, nuclear power offers powerful carbon benefits and could become competitive with other options with a carbon value of \$30 to \$50 per ton of CO<sub>2</sub> avoided.

Improved nuclear power technology is under development with U.S. government funding. The Energy Policy Act of 2005 contains incentives to support existing plants and promote R&D for new nuclear plants. But public concerns over plant siting, safe operation and waste disposal are probably the biggest barriers that the nuclear industry faces before this source of carbon free electricity sees a true revival.



## IGCC with Carbon Capture and Sequestration

Integrated gasification combined cycle (IGCC) power plants use coal to produce electricity in a fundamentally different process than pulverized coal plants. The process starts by heating coal under pressure to create a methane-rich gas, which, after cleaning, can be used in a combined-cycle unit (gas and steam turbines) for efficient electricity generation. While there are several operational IGCC plants in the U.S., the technology is not yet considered commercial due to its higher costs and questionable reliability. These hurdles, some argue, could be overcome with more field experience. Importantly, IGCC plants offer significant reductions in criteria pollutants and the ability to capture carbon emissions more efficiently than at pulverized coal plants.



Source: NETL, Wabash River IGCC plant

Without carbon capture and storage (CCS), IGCC plants are likely to offer, at best, a small reduction in carbon dioxide emissions compared to traditional pulverized coal. With CCS, IGCC plants could capture 85-95 percent of their emissions, which could then be injected into deep underground formations. A recent publication by the Intergovernmental Panel on Climate Change estimates that a carbon dioxide value of \$50-75 per ton is required to overcome the added cost of IGCC with carbon capture. This corresponds to an increase in electricity prices of approximately 2-3 cents per kilowatt-hour. To test the technical and economic viability of combining IGCC with CCS, at least two initiatives, FutureGen and ZeroGen, are underway, respectively, in the U.S and Australia. Slated for completion in 2012, these initiatives offer major learning opportunities.

U.S. utilities currently face difficult investment choices. Knowing that carbon constraints are no longer a question of “if” but of “when”, most forward-looking utilities seek to mitigate carbon liability risks in their investments decisions. Some would like to build IGCC plants now because of their environmental benefits and ability to capture carbon more easily, either immediately or at a later stage. But in most cases, a back-up gasifying unit is required for reliable operation of IGCC plants today. This spare gasifier raises capital costs and, combined with other uncertainties, makes investing in IGCC hard to justify in some jurisdictions. Clearly, providing greater certainty on the scale and timing of the looming climate policy would help utilities plan and invest more effectively. Without improved certainty, U.S. electric power security is threatened.

Other challenges besides high cost must be overcome before IGCC with CCS is to deploy more widely. Currently no regulatory framework exists to govern how CCS projects are done. How projects are sited, what monitoring must be done to ensure that carbon dioxide remains in specified reservoirs, how accounting is done to properly credit parties fairly, and how to design a financial responsibility system to deal with long-term liability remain unanswered questions. Ultimately, public acceptability of CCS also remains an issue.

## Corporate Average Fuel Economy (CAFE)


One proven way to improve energy efficiency in the U.S. transportation sector is the Corporate Average Fuel Economy (CAFE) program. The program was established by the Energy Policy and Conservation Act of 1975, and was one of the main forces behind a 35 percent increase in new vehicle (cars and light trucks) fuel economy between 1978 and 1985.<sup>2</sup> Without these improvements, the U.S. would be consuming an additional estimated 2.8 million barrels per day of gasoline, or about 25 percent of current demand.

While the CAFE program is not without controversy, it clearly achieved its goal of saving petroleum even in times of low gasoline prices. Since 1985, however, standards have not increased and there has been a slow, but steady decline in average vehicle efficiency.

The debate over raising CAFE requirements is a classic public policy issue that has been controlled by political interests. Done correctly, the economic costs of producing more efficient vehicles is quite manageable, despite the rhetoric voiced by U.S. manufacturers. In fact, a strong case has been made that Detroit's current financial problems are due to the fact that they were protected for too long through successful lobbying against higher CAFE requirements. There are some safety and consumer choice concerns that accompany an increase in CAFE requirements, but these are relatively minor given the overall national public interest of energy security and climate change.

Envelope-pushing revisions to the standards could again have a meaningful impact on U.S. liquid fuel consumption, although the effect would not be immediate. Replicating the success of the CAFE program from 1975, car mileage would need to increase from 27.5 mpg today to about 42 mpg in 2025. Light truck mileage would rise from 20.7 mpg today to 32 mpg by 2025. These new standards could save the country about 3 million barrels per day and reduce oil consumption by nearly one-quarter. Benefits from this policy action are the most cost-effective step the U.S. could take to improve energy security, stop the financing of radical terrorists, slash greenhouse gas emissions, and help make U.S. vehicle manufacturers more competitive.

**Adjusted Fuel Economy by Model Year  
(Three Year Moving Average)**

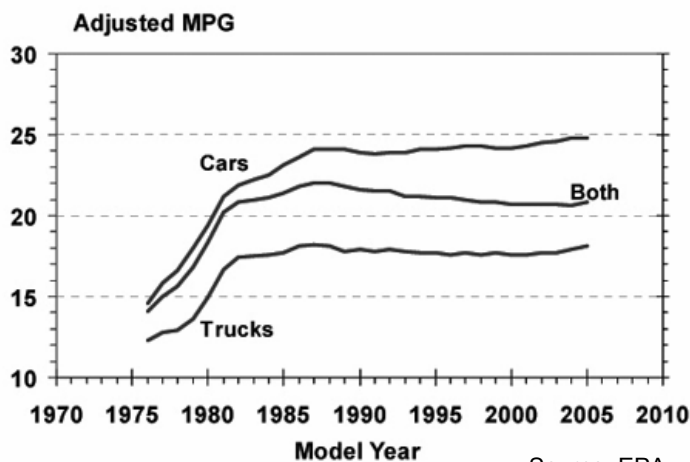

<sup>2</sup> Based on adjusted EPA sales-weighted data, and reduced by EPA to reflect the fact that cars or light trucks typically obtain only 85% of their tested fuel economy on the road. The fuel economy of cars alone increased more, but the shift to light trucks reduced the overall impact.

## Plug-In Hybrid Electric Vehicles



Source: [www.delta-q.com](http://www.delta-q.com)

A plug-in hybrid electric vehicle (PHEV) can operate on electric power for short trips without needing the liquid-fuel combustion engine. It thus offsets the need for liquid fuel by relying partially on the electricity grid. While liquid-fuel savings can be significant, the climate benefits of PHEVs depend on the local grid characteristics (coal/gas/nuclear/ renewables mix), when charging occurs, and the driving/recharging profile. As of 2007, no commercially-produced PHEVs were available to the general public.

Plug-in hybrids differ from traditional hybrids by having additional battery capacity and the ability to be recharged from an external electrical outlet. Depending on the size of the battery pack and other factors that typically affect fuel efficiency, PHEVs have an electric-only range of anywhere from 10 to 60 miles. The internal combustion engine is not needed for moderate speeds within this range, but is available for longer trips or if additional power is needed. Battery types include nickel-metal hydride (NiMH), currently used in all conventional hybrids, and lithium-ion (Li-ion). Li-ion batteries are smaller and lighter than NiMH, though they cost more and are not as safe or durable. When operating on liquid-fuels, PHEVs carry a weight penalty due to the relatively large batteries they carry.

The fuel and climate benefits of PHEVs are largely dependent on the amount of time the vehicle is using electricity instead of liquid fuel, which is further dependent on the electric-only range of the vehicle, trip duration, and recharging method. Climate benefits are additionally determined by the fuels used to produce the electricity, and whether excess capacity in the grid can be used. Due to this wide range of factors, estimates of the potential for plug-in hybrids to reduce CO<sub>2</sub> emissions compared to standard petroleum vehicles range from 10 to 60 percent. If users do not charge their cars during off-peak times, the climate benefits of PHEVs are reduced.

Operating costs in the electric-only mode are estimated to be roughly equivalent to around \$1 per gallon of gasoline, much lower than liquid fuel vehicles. However, PHEVs have higher upfront costs (largely for the battery) of roughly \$7,000-10,000 compared to traditional vehicles. Additional R&D is needed to develop long-lasting, efficient batteries.

PHEVs offer significant energy security benefits, as they offset oil consumption with mostly domestic sources of energy whenever battery power is used. Additionally, PHEVs can reduce air emissions in urban areas as they do not emit pollutants during the electric-only mode. Conversely, they can lead to increased mercury, sulfur, and other pollutants from coal-fired plants supplying additional electricity.

PHEVs are still an emerging technology today, primarily due to their high upfront costs and limited electric-only range. With advances in technology that increase this range and reduce battery costs, plug-in hybrid vehicles are likely to become more common.

## Heavy Oil and Tar Sands

Unconventional oil—which includes tar sands, heavy oil, bitumen, or shale oil—refers to any type of crude-like resource that does not flow easily and is hence difficult to produce. Remarkable quantities of heavy oil and tar sands are concentrated in Canada and Venezuela. The *Oil and Gas Journal* reclassified 174 billion barrels of Canadian oil sands to “established reserves” in 2002, catapulting the country to second behind Saudi Arabia in terms of total petroleum reserves. Venezuela’s “extra heavy oil” could follow a similar reclassification soon, potentially adding another 235 billion barrels to its

reserves, and making it the world’s largest reserve holder. These two countries will likely play an important role in supplementing the eventual decline in conventional oil output. There are profound technical, economic, and environmental challenges to overcome, however, before these oil resources can play a more significant role in the global energy supply.



Source: David Dodge, The Pembina Institute

Canadian tar sands are currently produced by surface mining and *in situ* extraction, in roughly equal amounts. The former method, relying on massive earth-moving equipment and processing facilities, has limited future capacity since 80 percent of the oil sand resources lie deep underground and are not accessible to open pit mining. The latter method currently relies on energy-intensive steam injection and large volumes of natural gas. However, conventional natural gas production may have peaked in Canada, leaving policymakers scrambling to figure out how future needs will be met. Nuclear power plants could substitute for natural gas to produce the steam needed, but the oil sands still require natural gas during the refining process to upgrade the petroleum product to a marketable commodity. New technologies are under development to make the deeper-lying resources economically and physically accessible. The International Energy Agency expects that Canadian oil sands output will rise from 1 million barrels per day (mb/d) now to 5 mb/d in 2030.

Venezuela has equally massive reserves of heavy oil in the Orinoco Belt. Approximately one-quarter of Venezuelan’s current crude output of 4 million barrels a day comes from heavy sources. This percentage is expected to rise as conventional resources decline and heavy oil recovery technologies improve. Currently, only a small percentage (5-10%) of original oil in place can be recovered economically. The World Energy Council believes Venezuelan heavy oil output will grow to 5.5 mb/d by 2030.

Greenhouse gas emissions associated with heavy oil production vary depending on location, oil quality (need for upgrading), and extraction method. Lifecycle emissions vary from roughly 15 percent above conventional oil use levels to over 50 percent or more. Carbon dioxide capture and sequestration could be applied to offset a portion of the extra greenhouse gas emissions from some heavy oil production, but it would add to costs. The local and regional environmental impacts of heavy oil and tar sands production can include: significant water consumption, massive earth moving and ecosystem disturbance, increased criteria and other air pollution, and release of heavy metals and toxic materials. New technologies have the potential to lower these environmental impacts, although they will likely remain substantially higher than conventional crude production.



## Oil Imports

Petroleum has a wide variety of uses, from fuel for cars to wax for candles. The majority, however, is converted to motor gasoline and diesel fuel for use in cars, trucks, planes, ships, rail, and other forms of transportation. The U.S. currently accounts for one-quarter of the world's oil use, despite holding less than 2% of total global reserves. This discrepancy causes us to import the majority of our oil. In 2005, the U.S. imported over 13 million barrels per day (mb/d) of crude oil and petroleum products, roughly two-thirds of our oil needs. Almost 60% of this oil came from just five countries: Canada (2.2 mb/d), Mexico (1.7 mb/d), Saudi Arabia (1.5 mb/d), Venezuela (1.5 mb/d), and Nigeria (1.2 mb/d). According to *The Oil & Gas Journal*, over half of total global reserves are located in the Middle East.



Source: Saudi Aramco

The Arab oil embargo of 1973 led by the Organization of Petroleum Exporting Countries (OPEC) caused a major energy crisis in the U.S., triggering fuel shortages, long lines at the pump, and greatly inflated prices. Combined with other factors, these events led to an economy-wide recession, high unemployment, and widespread inflation. Reducing dependence on foreign nations for our energy supply quickly became a national priority. The enactment of fuel efficiency standards for cars and trucks (CAFE), establishment of the strategic petroleum reserve, a 55 mile-per hour federal speed limit, and expansion of daylight savings time all originated out of concerns to limit our dependence on foreign oil. New sources of energy were sought by expanding domestic exploration and production, and pursuing alternative fuels. Demand side management and end-use efficiency policies received enormous attention at the federal and state level. Energy security became an integral component to foreign policy, particularly in dealing with the Middle East. While powerfully effective during the initial years, support for these policies melted away as energy prices declined during the 1980s and 1990s. Today, we import more than twice as much oil as we did in the mid-1970s, and roughly 40% of our oil imports originate in OPEC countries.

Oil use has a number of environmental concerns. When fuels derived from oil are combusted, air pollutants such as CO, NO<sub>x</sub>, and NMVOCs as well as CO<sub>2</sub> are emitted to the atmosphere. Cars and trucks now have sophisticated pollution control equipment such as catalytic converters to reduce emissions of local air pollutants. However, no cost-effective equipment can trap and reduce CO<sub>2</sub> emissions from vehicle tailpipes. Emissions from the transport sector, primarily from petroleum fuels, account for roughly one-third of all greenhouse gas emissions in the United States.

High oil prices, the possibility of peak oil, and our reliance on unstable nations are again inciting calls for the U.S. to move towards 'energy independence.' Today, there are a flurry of bills in Congress promoting energy security through initiatives promoting domestic oil production, alternatives such as coal-to-liquids, biofuels such as ethanol and biodiesel, and increased energy efficiency through CAFE or similar measures. However, our growing energy needs, the relative affordability of oil compared to alternatives, and a lack of access to remaining petroleum resources will likely cause the U.S. to continue relying on oil imports substantially in the near term.

## Solar Photovoltaics

Solar photovoltaics (PV) convert solar energy directly into electricity using a semiconducting material. Conventional crystalline silicon-based solar PV cells comprise the majority of this market today, though recent shortages of silicon have increased investments in alternative types of PVs such as thin film cells. Thin film technology is cheaper than silicon-based PV, but is currently less efficient.

Solar cells can be used in small products such as calculators and watches, or grouped into solar panels, which in turn can be assembled into arrays to meet greater energy needs (see figure). Larger applications include remote stand-alone systems, grid-connected systems for buildings, and large-scale power plants. The modular flexibility, ease of installation, low maintenance, and minimal environmental impacts make PVs attractive long-term prospects for mass production and application in many parts of the world. Solar PVs produce energy without emitting air pollution or greenhouse gases; thus, they are an important option to meet rising electricity demand in a carbon-constrained world. There are some environmental and human health concerns associated with chemicals, such as cadmium and arsenic, used in the manufacturing process. However, these hazards can be minimized with proper handling and safety precautions.



Source: NREL

According to the Solar Energy Industries Association (SEIA), global PV market growth has averaged 25 percent annually over the last 10 years, with worldwide growth rates for the last 5 years well over 35 percent. Despite this rapid growth, PVs still account for a small percentage of global electricity generation. Deployed PV systems around the globe totaled approximately 5,000 megawatts of capacity in 2005. One of the primary reasons for limited diffusion of PVs is high costs, particularly for grid-connected systems. Capital costs have declined significantly since the 1970s from \$30-35 per watt to \$4-5 per watt today. Nevertheless, PVs are not yet competitive with grid connected systems. The intermittent nature of this power is an additional hurdle; off-grid systems require back-up power or battery storage, increasing overall costs.

The main challenge facing the solar industry today is to improve the efficiency of PV systems while making costs comparable to other electricity generating technologies. Solar PVs are gradually becoming popular, particularly for small off-grid applications. Japan and Germany are leading the way with robust national incentive policies, despite inferior sunlight availability. In the United States incentives are being provided by states to buy down the costs of PV installation. California's Million Solar Roofs Program, with a goal to create 3,000 megawatts of new solar installations by 2017, is a significant step in promoting the abundant resource. With technological innovation, coherent policies and further cost reductions, solar photovoltaics will play an increasingly important role in meeting our energy needs.